



Industrial-Infrared-Thermometer



Measuring Range : 32°C-
320°C, 400°C, 600°C, 700°C,
900°C, 1000°C, 1050°C,
1350°C, 1650°C, 2200°C,
2500°C
Selection : °C or °F
Response Time : 500ms
Display : LCD
Accuracy : ±1.5°C

Product Code : IITHH

Temperature Transmitter



Power Supply : 24 VDC
Out put : 4-20mA+HART
Connection : Flanged
Probe length : Customized

Product Code : TT-AF

Temperature Transmitter



Power Supply : 24 VDC
Out put : 4-20mA+HART
Connection : Screwed
Probe length : Customized

Product Code : TT-AS


Temperature Indicator Trnsmitter



Display : LCD
Power Supply : 24 VDC
Out put : 4-20mA+HART
Connection : Flanged/Screwed
Probe length : Customized

Product Code : TIT-AS

Bi-Metal Temperature Gauges

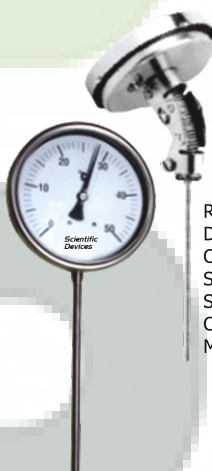

Range : -20-600°C
Dial : 65, 100 MM
Case : SS304
Stem OD : 6,8,10 MM
Stem length : Customized
Connection : 1/4", 3/8", 1/2"
Mounting : Bottom, Back

Product Code : BMTG

Mercury In Steel Temperature Gauges



Range : -20-600°C
Dial : 100, 150 MM
Case : SS304
Stem OD : 6,8,10, 12 MM
Stem length : Customized
Connection : 1/2" Adjustable
Mounting : Bottom, Back

Product Code : MSTG

Thermo Couple & RTD Assemblies



Range : 0-1600°C
Stem OD : 6,8,10, 12, 16,
19 MM or
Customized
Stem length : Customized
Connection : Customized

Product Code : THQ-RTD

Thermowells & Protection Tubes



Product Code : TW

Temperature Indicator & Controller



Input : RTD,
Thermocouple
Display : LED
Case : PVC
Power Supply : 230 VAC
Accuracy : ±0.2% FSD

Product Code : TIC